

WITNESS PARK MEMORIAL STONE STANDARDS

FOOTERS

Footers shall be poured concrete installed by a contractor selected by the Witness Park Board. All footers shall be thirty inches deep - [* 1]. The footer's length and width shall exceed the monument's base dimensions, on all four sides, by a three inch margin.

Payment for memorial stone footers will be made by the family, to a funeral director when funeral arrangements are made or to the monument vendor when the memorial stone is purchased.

BASE STONES

All monument bases must be six to eight inches high and exceed the four-sided perimeters of the monument by three inches.

SINGLE MONUMENTS


Single stone monuments shall be thirty inches wide and have a height of twenty inches [minimum] up to, but not exceeding, thirty-six inches [maximum]. The thickness standard shall be eight inches [maximum].

SLANT STONES

Slant stone height must be a minimum of eighteen inches. Base height, and perimeters shall have the same standards as required for the standing upright monuments and base stones. Slant stone depth [front to back] shall not exceed a sixteen inch maximum.

DOUBLE MONUMENTS

Husband and wife double monuments shall not exceed a maximum width of sixty inches. All other double stone dimension requirements will be the same as the slanted and /or single stone standards.

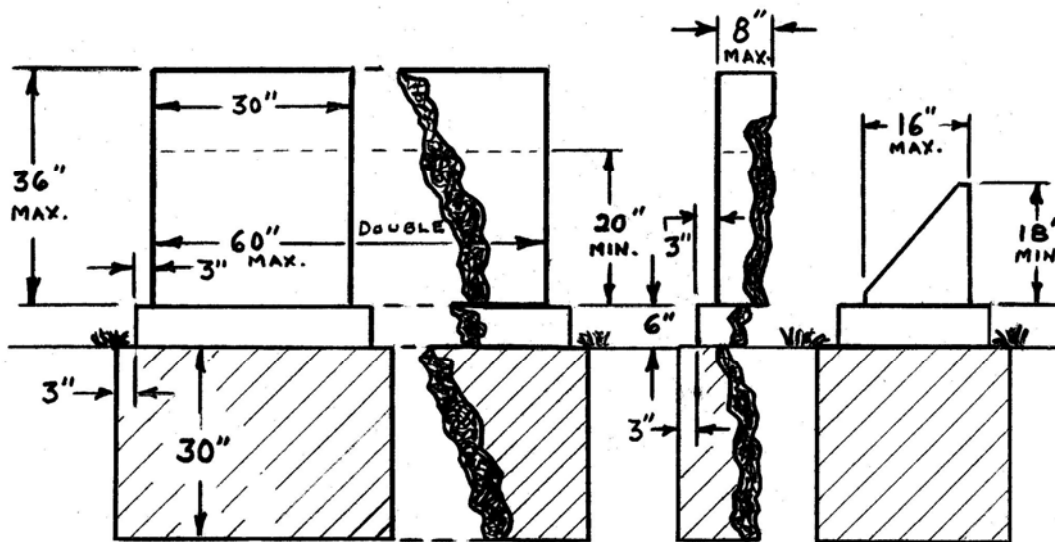

gh 13 Aug 07
Rev. 1 - gh 03 Jul 08 removed crushed stones

FRONT VIEW

SIDE VIEWS

* Rev 1 / removed crushed stones / gh Jul 08